

# TS02FH

## Full Height Turnstile


304 Brushed Stainless Steel

The movement with absorber structure, making the product operate very quietly.

Support integrated with any type access control system

Fire Safety requirement, arm open automatically


Structure of trunking to contain cable tidy inside the case

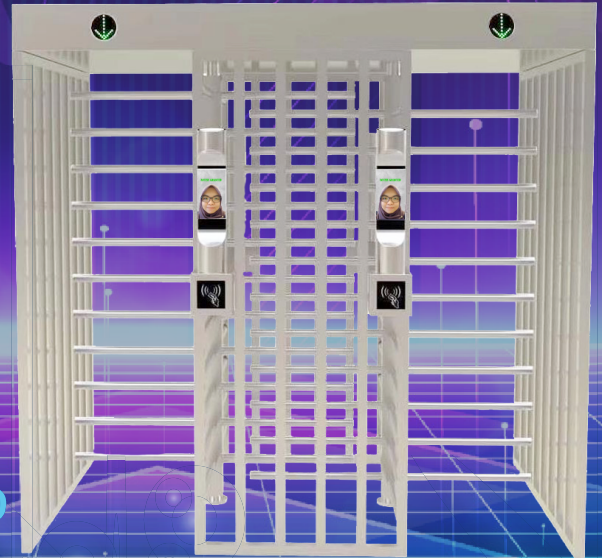

Card Solution



QR/Bar code Solution

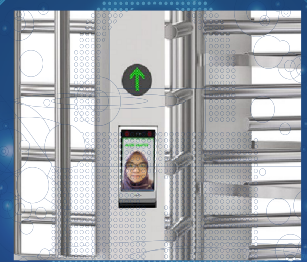

Biometric Solution

### Specification

Description	Parameters
Frame Material	SS304 Stainless Steel
Passing Direction	Single directional / Bi-directional
Door opening / closing speed	Programmable < 2 sec
Optimal flow rate	30 people per minute
Power supply	AC220+10%, 50Hz
Power Consumption	DC 24V / 40W
Motor	DC Brushless Motor
Input Connection	Dry contact pulse > 500ms
Working environment	Indoor / Outdoor
Working Temperature	-40°C - 80°C
Relative Humidity	≤ 90%
Passage Width	600mm
Comuncationl	Dry contact, Relay Signal ,RS485
Dimension	2300(L) x 1540(W) x 2300(H) mm
Waterproof Level	IP 65